




TECHNICAL DATA SHEET

# SUPERIOR MASKING TAPE

Gerko Superior Masking Tape is a high-grade automotive masking tape recommended for demanding automotive repair workshops and high degree oven use. Saturated semi crepe paper masking tape coated with specially developed cross-linked solvent based natural rubber adhesive. Also suitable for all general masking applications.

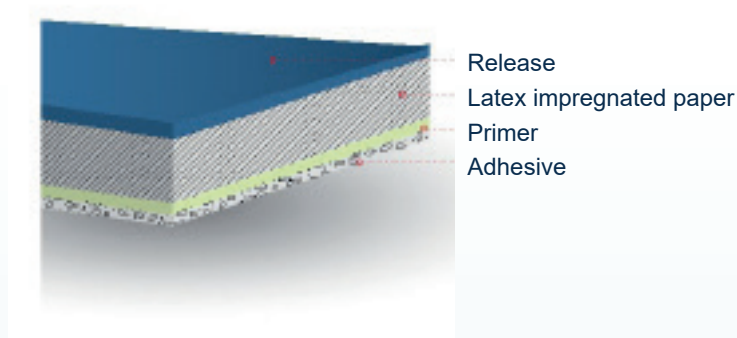

## APPLICATION CONDITIONS

Gerko superior masking tape is suitable for water and solvent based paints. Temperature resistance: 60 minutes at 80°C.

## PROPERTIES

- Suitable for water-based paints
- Ideal for spraying with high quality furnace use
- Clean edges for precise and easy application
- Excellent tape on tape application
- Suitable for both metal and plastic surfaces
- Different surface options to meet special requirements
- Easy to remove without glue residue
- Heat resistant: 100°C - 30 min, 80°C - 60 min
- Adhesion to steel: 5 (N/25 mm)
- Total thickness: 125 microns
- Resistant to solvents
- Suitable for water and solvent based paints
- Easy to tear
- Excellent formability
- Suitable for IR and UV drying



## TECHNICAL DATA SHEET

# SUPERIOR MASKING TAPE

**NOMINAL VALUES**

	VALUE
Backing	Impregnated crepe paper
Adhesive	Solvent-based, natural rubber
Tensile Strength MD	95 ± 20 (N/25 mm) TM 5004 by Afera
Elongation at Break MD	9 ± 2 (%) TM 5004 by Afera
Peel Adhesion on Stainless Steel	5 ± 1 (N/25 mm) TM 5001 by Afera
Paper thickness	100 ± 15 (µm)
Total thickness	125 ± 15 (µm)
Temperature resistance	80°C (60 min)

**PHYSICAL PROPERTIES**

Code	Description	Width x length	Paper colour	Pieces per box	Boxes per pallet
SMT19	Superior Masking Tape	19 mm x 50 m	Yellow	48	96
SMT24	Superior Masking Tape	24 mm x 50 m	Yellow	36	96
SMT30	Superior Masking Tape	30 mm x 50 m	Yellow	32	96
SMT38	Superior Masking Tape	38 mm x 50 m	Yellow	24	96
SMT50	Superior Masking Tape	50 mm x 50 m	Yellow	24	72