




TECHNICAL DATA SHEET

AQUA MASKING TAPE

Gerko aqua masking tape is a high quality waterproof masking tape for the professional user with high temperature resistance to minimize the chance of residue. Saturated crepe paper masking tape coated with specially developed cross-linked solvent based natural rubber adhesive.

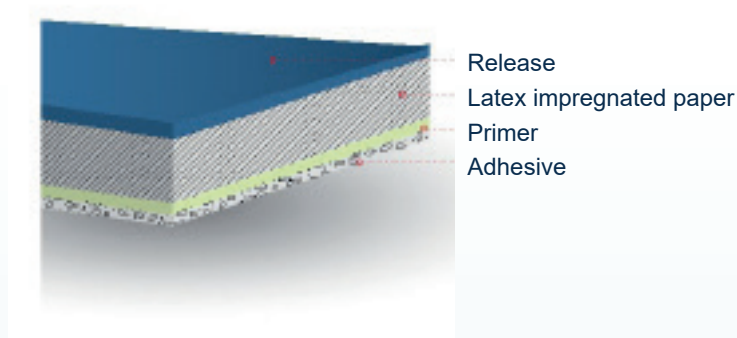

APPLICATION CONDITIONS

Gerko aqua masking tape is recommended for waterbased paint systems. Guaranteed spray painting oven use in 120°C for 30 minutes.

PROPERTIES

- Suitable for water based paints
- Excellent adhesion to rubber and metal
- Easily removable and leaves no adhesive residue
- Paper: impregnated green crepe paper
- Thickness: 135: microns
- Temperature resistance: 30 minutes at 120°C
- Adhesion to steel: 5 N/25 mm
- Excellent tape on tape adhesion
- Sharp and clean edge for precise sticking and easy application
- Solvent and water resistant
- Suited for IR and UV drying



TECHNICAL DATA SHEET

AQUA MASKING TAPE**NOMINAL VALUES**

| | VALUE |
|----------------------------------|-------------------------------------|
| Backing | Impregnated crepe paper |
| Adhesive | Solvent-based, natural rubber |
| Tensile Strength MD | 110 ± 30 (N/25 mm) TM 5004 by Afera |
| Elongation at Break MD | 10 ± 3 (%) TM 5004 by Afera |
| Peel Adhesion on Stainless Steel | 5 ± 1 (N/25 mm) TM 5001 by Afera |
| Paper thickness | 110 ± 15 (µm) |
| Total thickness | 135 ± 25 (µm) |
| Temperature resistance | 120°C (min) |

PHYSICAL PROPERTIES

| Code | Description | Width x length | Paper colour | Pieces per box | Boxes per pallet |
|-------|-------------------|----------------|--------------|----------------|------------------|
| AMT19 | Aqua masking tape | 19 mm x 50 m | Green | 48 | 96 |
| AMT24 | Aqua masking tape | 24 mm x 50 m | Green | 36 | 96 |
| AMT30 | Aqua masking tape | 30 mm x 50 m | Green | 32 | 96 |
| AMT38 | Aqua masking tape | 38 mm x 50 m | Green | 24 | 96 |
| AMT50 | Aqua masking tape | 50 mm x 50 m | Green | 24 | 72 |